


## **INTRODUCING** The Hydroscreen Family of Solutions for Storm Water Treatment

Hydroscreen has developed a family of BMP (Best Management Practices) solutions for the treatment of storm water runoff.

- a** **OUTFALL SCREENS.** Screen flows of up to 1,000 cubic foot per second of debris laden storm water runoff.
- b** **CURB INLET FILTER DEVICES.** Non-clogging, low maintenance, cost effective and easy installation.
- c** **DETENTION POND OUTLET SCREENING.** Effective removal of all sediments, debris and floating organic contaminants.
- d** **DOWNSPOUT AND RAIN HARVESTING FILTERS.** The perfect “green” solution for the removal of debris and sediments from structural runoff.

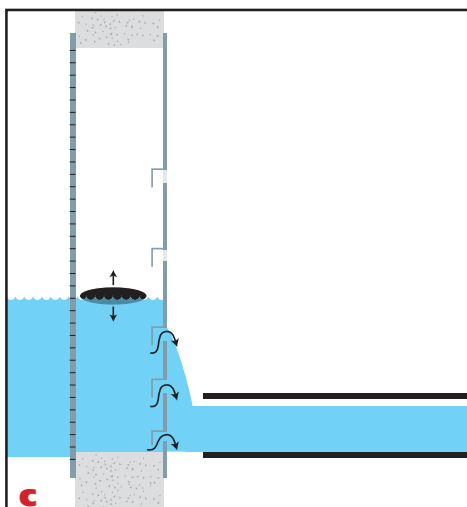

If you would like more information, please visit our web page:

[www.hydroscreen.com](http://www.hydroscreen.com)

or contact us by phone at 1-800-567-4916, fax 303-393-8298 or e-mail [rkweir@aol.com](mailto:rkweir@aol.com)

Our professional engineering staff will assist you in the sizing and design for any of the above solutions.